

Bulgin's range of **high quality rocker switches** includes a huge choice of **single** and **double contact** options available in various sizes, colours, terminations, actuator types and **ratings up to 20A, 277Vac**, allowing for virtually any design configuration.

- ⬡ Available types: Ultra-thin, Miniature, Twin unit, Miniature round and Standard
- ⬡ Rating from 10A, 250V ac up to 20A, 277V ac
- ⬡ Single & double contact variants available
- ⬡ Push-on, solder & PCB terminals
- ⬡ Illuminated and non-illuminated options
- ⬡ High in-rush (ON-OFF types)
- ⬡ Matching Indicators
- ⬡ Splash resistant options
- ⬡ Choice of bezel styles and sizes, panel cut-outs and actuators
- ⬡ Choice of switching circuits including 3 position



# 8800 Thinline Rocker Switches

10A 250Vac














### Key Features

- Ultra thin rocker switch
- Ratings up to 15A, 250Vac
- Single and twin gang
- Panel cut out:  
Single 19.3 x 6.8  
Twin 19.3 x 13.4


### Approvals and specifications

- 6(2) A 250 V AC 5E4 T100  
10(6) A 250 V AC 1E4 T100  
Inrush 10/50 A 250 V AC 1E4 T100
- UL 15A 250Vac (Twin unit is 10A 250Vac)  
UL 125Vac 1/2hp  
UL 100°C, CSA file LR10990
- 3mm contact gap.


Terminal	Function	Rocker	Body	Body Colour	Rocker Colour
<b>H</b> 	 Switches are ON when pressed over terminal 1		<b>A. Single contact</b>  Panel Cut  Bezel   *Optional profile for orientation	<b>B</b> Black	<b>B</b> Black
<b>T</b> 	<b>8800</b>  ON - OFF Single contact		<b>B. Single contact - Twin</b>  Panel Cut  Bezel   *Optional profile for orientation	<b>R</b> Red	<b>R</b> Red
<b>X</b> 	<b>8800</b>  ON - OFF Twin contact		  Panel thickness 0.75-1.2 1.25-1.99 2.00-3.00  Dim X 19.1/19.2 19.3/19.4 19.7/19.8  Cut-outs must be punched in the direction of insertion	<b>W</b> White	<b>W</b> White

### Dimensions

8800VA (H terminals shown)



8800V/8800VA (H terminals shown)



Legend	Legend Colour	Options
Blank	Blank	<p><b>Finish</b> Matt finish only.</p> <p><b>Colour</b> Call sales for custom colours. A full range is available for large orders.</p> <p><b>Legend printing</b> Select from the examples or call sales for custom legends.</p>
<b>132</b>	<b>B</b> Black	
	<b>W</b> White	

### Examples



☐ X8800VA



☐ X8800VA  
☐ T8800VA - - -



☐ X8800VA  
☐ T8800VA - - -



☐ H8800V/H8800VA  
☐ T8800V/T8800VA



☐ H8800V/H8800VA  
☐ T8800V/T8800VA

# 8500 Rocker Switches - Miniature

15A 250Vac Single & Double Contact



## Key Features

- Miniature rocker switch
- Ratings up to 15A, 250Vac
- Single & double contact in same body size
- Illuminated & non-illuminated
- Matching indicators
- Industry standard panel cut-out
- Rotary and push button actuator options
- Panel cut out: 19.3 x 12.9


## Approvals and specifications

- 6(4) A, 250 VAC, 5E4, T125
- 10(6) A, 250 VAC, T125
- 10(6) A, 250 VAC, T100
- UL 15A Non Ind 250Vac, 14A Ind 250Vac, 10A 277Vac
- UL 250Vac 1/2hp, 125Vac 1/4hp
- UL 105°C, (non lit)
- 3mm contact gap.



Terminal	Function	Rocker	Body	Body Colour	Rocker Colour
<b>H</b> 	<p>ON OFF Switches are ON when pressed over terminal 1</p>	<b>H</b> Slotted for custom caps 	<b>B</b> Standard body with terminal barrier 	<b>B</b> Black	Un-Lit <b>B</b> Black
<b>K</b> 	<b>8500</b> <p>ON - OFF Single contact (Uses terminals 1a &amp; 2a)</p>	<b>R</b> Semi-rotary (not lit) 	<b>BC</b> Body without terminal barrier 	<b>R</b> Red	<b>R</b> Red
<b>L</b> <p>Right angle version of K terminal available on 8500 only</p>	<b>8503</b> <p>ON (lit) - OFF Single contact</p>	<b>D</b> Paddle lever (not lit) 	<b>BC</b> Body without terminal barrier 	<b>W</b> White	Lit <b>A</b> Amber
<b>R</b> 	<b>8553</b> <p>ON (lit) - OFF Double contact</p>	<b>V</b> Curved (not lit) 	<b>BC</b> Body without terminal barrier 	<b>W</b> White	<b>G</b> Green
<b>T</b> <p>Solder</p>	<b>8580</b> Available with H terminals only <p>Indicator UL/CSA E83363</p>	<b>V</b> Curved (lit) 	<b>BC</b> Body without terminal barrier 	<b>W</b> White	<b>C</b> Clear
		<b>X</b> Two colour (not lit) 	Dimensions for snap-in fixing Panel thickness      Dim X 0.75-1.25            19.1/19.2 1.25-2.00            19.3/19.4 2.00-3.00            19.7/19.8		<b>R</b> Red
		<b>A</b> Softline lens 	Cut-outs must be punched in the direction of insertion		
		<b>P</b> Push button operation (8500 only) See drawing opposite			

## Dimensions



“B” body with barrier for H, T and K terminals



“BC” body w/o barrier primarily for L or R terminals (can be used for all terminals)



‘PO’ Actuator and body - push button function (8500 only)



Insert Colour	Lamp Voltage	Legend	Legend Colour	Options
<b>X</b> Rocker Only	Blank	Blank	Blank	<p><b>Finish</b> Matt finish only.</p> <p><b>Colour</b> Call sales for custom colours. A full range is available for large orders.</p> <p><b>Legend printing</b> Select from the examples or call sales for custom legends.</p> <p><b>Lamp voltage</b> Call sales for details of available voltages.</p> <p><b>Protective cover L167</b> Snaps on to bodies with V or X style rockers and A lens. This reduces panel thickness by 0.8mm.</p>
<b>R</b> Red	<b>2</b> 125V Neon	<b>076</b>	<b>B</b> Black	
<b>W</b> White	<b>3</b> 250V Neon		<b>W</b> White	
Leave blank for other Rocker types	<b>7</b> 12V Filament			
	<b>8</b> 24V Filament			



## Examples



▮ H8500VB ---  
▮ T8500VB ---



▮ H8550VB ---  
▮ T8550VB ---



▮ H8550HB ---  
▮ T8550HB ---



▮ H8550XB ---  
▮ T8550XB ---



H8550RB Semi-rotary  
A splash proofing option



▮ H8500PO ---  
Pushbutton option



▮ H8553VB ---  
▮ T8553VB ---



▮ H8580AB ---

# 8600 Rocker Switches - Miniature

10A 250Vac Single & Double Contact



## Key Features

- Miniature rocker switch
- Ratings up to 16A, 250Vac
- Single & double Contact
- ON/OFF, C/O, biased and centre off switching
- Push on, solder and PCB terminals
- Illuminated and non illuminated
- Matching indicators
- Panel cut out single: 19.3 x 12.9 double: 19.3 x 21.9

## Approvals and specifications

10(4)A 250Vac T90 (unless noted below)


UL See ratings below  
UL 65°C, file E45221

3mm contact gap except where marked  $\mu$ .


Terminal	Function	Rocker	Body	Body Colour
<b>H</b>  4.8 x 0.8 7.4	Approvals & ratings vary with function  <b>8600</b> 10(4)A 16A 250V, 10A 277V 1/2HP 277V, 1/4HP 125V ON - OFF  <b>8650</b> 10(4)A 10A 277V 1/2HP 277V, 1/4HP 125V ON - OFF  <b>8601</b> 6(1)A 16A 250V, 6A 277V ON - OFF (momentary ON)  <b>8651</b> 6(1)A 6A 277V ON - OFF (momentary ON)  <b>8602</b> 10A 6A 277V ON - OFF (momentary OFF)  <b>8652</b> 10(4)A 6A 277V ON - OFF (momentary OFF)  <b>N/A</b> ON - OFF Lit <b>8610</b> 6(1)A 10A 277V 1/2HP 277V, 1/4HP 125V ON - ON  <b>8660</b> 6(1)A 10A 277V 1/2HP 277V, 1/4HP 125V ON - ON  <b>8611</b> 6A 277V ON - ON (momentary 1 side)  <b>8661</b> 6A 277V ON - ON (momentary 1 side)  * 8611 and 8661 not covered by ENEC <b>8620 <math>\mu</math></b> ON - OFF - ON  <b>8670 <math>\mu</math></b> ON - OFF - ON  <b>8630</b> 6(1)A UL E63363 CSA LR29381  Indicators	<b>V</b> Curved  <b>V</b> Curved (lit)  <b>F</b> Flat Indicator only (Single contact) 	<b>B</b> Single Contact Panel cut out  Bezel  Single Contact dimensions for snap-in fixing Panel thickness 0.75-1.25 1.25-1.99 2.00-3.00 Dim X 19.1/19.2 19.3/19.4 19.7/19.8 <b>B</b> (Double Contact) with terminal barrier <b>BC</b> (Double Contact) w/o terminal barrier Panel cut out  Bezel  Double Contact dimensions for snap-in fixing Panel thickness 0.75-1.24 1.25-1.99 2.00-3.00 Dim X 19.1/19.2 19.3/19.4 19.7/19.8 Cut-outs must be punched in the direction of insertion	<b>B</b> Black <b>R</b> Red <b>W</b> White


## Dimensions

Single contact



Double contact



Rocker Colour	Lamp Voltage	Legend	Legend Colour	Options
Un-Lit <b>B</b> Black	Blank	Blank	Blank	<a href="#">Finish</a> Matt finish only.
<b>R</b> Red	<b>2</b> 125V Neon	<b>076</b>	<b>B</b> Black	<a href="#">Colour</a> Call sales for custom colours. A full range is available for large orders.
<b>W</b> White	<b>3</b> 250V Neon		<b>W</b> White	<a href="#">Legend printing</a> Select from the examples or call sales for custom legend.
Lit <b>A</b> Amber	<b>7</b> 12V Filament			<a href="#">Lamp voltage</a> Call sales for details of available voltages.
<b>G</b> Green	<b>8</b> 24V Filament			<a href="#">Blanking plate A8634FB</a> Dummy unit to fill unused panel holes. Single contact size only.
<b>C</b> Clear				<a href="#">Protective covers</a> <a href="#">L167 for SP</a> <a href="#">L180 for DP</a> Snap on to bodies with V rocker or F lens. This reduces panel thickness by 2.2mm.
<b>R</b> Red				 <a href="#">Single Contact options</a> Most switches shown can have single contact switching in double contact bodies.

## Examples



H8600VB ---  
T8600VB ---



H8600VB ---  
T8600VB ---



H8630FB ---  
T8630FB ---



H8650VB ---  
T8650VB ---




H8660VB ---  
T8660VB ---



H8653VB ---  
T8653VB ---

# 8620 & 8670 Rocker Switches

3 Positions - 10A 250Vac



## Key Features

- 3 position miniature rocker switch
- Panel cut out: single: 19.3 x 12.9 double: 19.3 x 21.9
- Ratings up to 15A, 250Vac
- Single & double Contact
- Centre off switching
- Push on, solder and PCB terminals
- Matching indicators


## Approvals and specifications


- 10(4)A 250Vac T90
- UL 15A 277Vac (Single Contact)
- UL 250Vac 1/2hp (Single Contact)
- UL 125Vac 1/4hp (Single Contact)
- UL 10A 277Vac (Double Contact)
- UL 277Vac 1/2hp (Single & Double Contact)
- UL 90°C
- μ contact gap.

Terminal	Function	Rocker	Body	Body Colour	Rocker Colour
<b>H</b>  4.8 x 0.8	<b>8620</b>  ON - OFF - ON Single Contact	<b>V</b>  Curved	<b>B</b> Single Contact  Panel thickness 0.75-1.24 1.25-1.99 2.00-3.00 Dim X 19.1/19.2 19.3/19.4 19.7/19.8	<b>B</b> Black	Lit (DP) <b>A</b> Amber
<b>T</b>  Ø2.15 Solder	<b>8670</b>  ON - OFF - ON Double Contact	<b>H</b>  Slotted for actuator (8620 only)	<b>B</b> Single Contact - Twin  Panel thickness 0.75-1.24 1.25-1.99 2.00-3.00 Dim X 19.1/19.2 19.3/19.4 19.7/19.8	<b>R</b> Red  <b>W</b> White	<b>C</b> Clear  <b>G</b> Green  <b>R</b> Red
<b>X</b>  PCB 0.8sq Double Contact switches with X terminals are supplied without terminal barriers			Cut-outs must be punched in the direction of insertion		Lit (DP) <b>B</b> Black  <b>R</b> Red  <b>W</b> White



## Dimensions

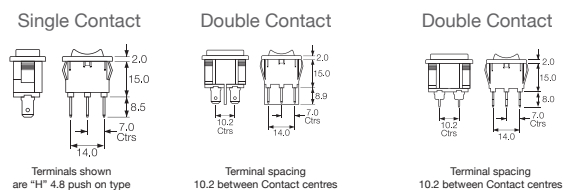

Lamp Voltage	Legend	Legend Colour	Options
Blank	Blank	Blank	<p><b>Finish</b> Matt finish only.</p> <p><b>Colour</b> Call sales for custom colours. A full range is available for large orders.</p> <p><b>Legend printing</b> Select from the examples or call sales for custom legend.</p> <p><b>Lamp voltage</b> Call sales for details of available voltages.</p> <p><b>Blanking plate A8634FB</b> Dummy unit to fill unused panel holes. Single Contact size only.</p> <p><b>Protective covers</b> L167 for SP L180 for DP Snap on to bodies with V rocker or F lens. This reduces panel thickness by 2.2mm.</p>  <p><b>Single Contact options</b> Most switches shown can have single Contact switching in double Contact bodies.</p>
<b>2</b> 125V Neon	<b>076</b>	<b>B</b> Black	
<b>3</b> 250V Neon		<b>W</b> White	
<b>7</b> 12V Filament			
<b>8</b> 24V Filament			

# 1250 Rocker Switches

10A 250Vac



C1250AP ---



C1250AN ---




### Key Features


- Standard rocker switch
- Double Contact in single Contact body
- Snap in or sub panel mount
- Integral terminal barrier
- Push on or PCB terminals
- Panel cut out: 27.2 x 12.4 (snap in) 26.3 x 12.4 (sub panel mount)

Terminal	Function	Rocker	Body	Body Colour	Rocker Colour
<b>C</b>  6.3 x 0.8	 <b>1250</b>  ON - OFF Double Contact Contacts are 9.0mm between centres.	<b>A</b> Curved  Shown in N body	<b>N</b> Panel cut-out Sub-panel Facia Bezel Panel thickness 0.75-1.24 1.25-1.99 2.00-3.00 Dim X 26.1/26.2 26.3/26.4 26.7/26.8	<b>B</b> Black  <b>W</b> White	<b>B</b> Black  <b>W</b> White
<b>X</b>  5.2 x 9.0 PCB 0.8sq (N body only)	 <b>1250SP</b>  ON - OFF Single Contact	 Shown in P body	<b>P</b> Panel cut out Bezel Panel thickness 0.75-3.00 <small>Cut-outs must be punched in the direction of insertion</small>		<b>G</b> Grey

### Dimensions

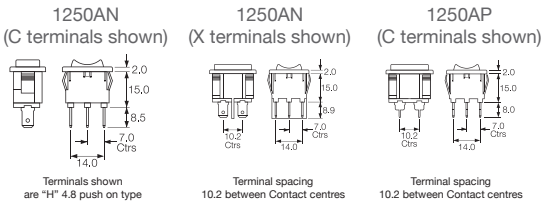

### Approvals and specifications

-  10(6)A 250Vac T100  
6A 400Vac T100  
1A 30Vdc
-  UL 10A 250Vac  
UL 16A 250Vac Resistive  
UL 125Vac 1/2hp  
UL 1A 30Vdc  
UL 100°C
- 3mm contact gap

Legend	Legend Colour	Options
Blank	Blank	<b>Finish</b> Matt finish only.
<b>085</b>	<b>B</b> Black	<b>Colour</b> Call sales for custom colours. A full range is available for large orders.
	<b>W</b> White	<b>Legend printing</b> Select from the examples or call sales for custom legend.

# 7500 Rocker Switches

30A 250Vac




## Key Features

- ⬡ IP68 Rated
- ⬡ Rated to 30A at 250V
- ⬡ Available colours:
  - Transparent: Red, Green, Blue, Yellow, White,
  - Solid: Black
- ⬡ Termination options: Screw Terminal, 6.3 X 0.8mm solder tab / Push fit
- ⬡ Switch functions available: ON-OFF, ON-ON, ON-OFF-ON.
- ⬡ Panel Cut Out - 30mm x 22mm

## Approvals and specifications



UL = 30A 250Vac, 40T85, 1E4 (10,000 cycles)  
cUL = 30A 250Vac, 40T85, 1E4 (10,000 cycles)



Terminal	Function	Rocker	Lamp Voltage	Rocker Colour
<b>C</b>  6.3 x 0.8mm	<b>7510</b>  ON - OFF	<b>T</b> Transparent 	<b>000</b> No LED	Illuminated (DP)
	<b>7520</b>  ON - ON	<b>S</b> Solid 	<b>012</b> 12V	<b>R</b> Red
<b>S</b>  Screw & Clamp	<b>7530</b>  ON - OFF - ON		<b>024</b> 24V	<b>G</b> Green
			<b>110</b> 110V	<b>B</b> Blue
			<b>250</b> 250V	<b>Y</b> Yellow
				<b>W</b> White
				<b>K</b> Black Non-Illuminated (DP)

General Specifications	
Electrical	
Voltage	250VAC
Current	30A
Insulation Resistance	≥50MΩ/500VDC
Power-Frequency Withstand Voltage	AC1500v 10s
Durability	10,000
Operating Temperature	-40°C to 85°C
Switch Contact Configuration	Double Pole
Technical	
Panel Mount Cut-Out	22mm X 30mm Square
Max Panel Thickness	2.5mm
Terminal Material	Brass (Silver Plated)
Body Material	PA66 Nylon
Approvals	UL (File Number: E45221)
IP Rating	IP68

# 6000 SP Splash Resistant Rocker Switches

16A 250Vac



## Key Features

- Ratings up to 20A, 277Vac
- Positive switch action
- Distinctive styling
- Illuminated & nonilluminated
- Single Contact
- Panel cut out: 30.1 x 11.1mm

## Approvals and specifications




European 16(4)A 250Vac T125, 10A 400Vac T125

UL = 20A 277Vac, 1 1/2HP 250Vac 1HP 125Vac  
cUL = 20A 277Vac, 1HP 125Vac, 1/2HP 125Vac

3mm contact gap with Positive Break switching.  
Call factory for IP details.

## Vary with Function

Approvals & ratings vary with function  
ON OFF Switches - ON when pressed  
over terminals 3.




Terminal	Function	Rocker	Body	Body Colour	Rocker Colour	Lamp Voltage
<b>C</b> 	<b>6000</b>  <b>6001</b>  ON - OFF (momentary ON)	<b>A</b> Softline Matt 	<b>L</b> Panel cut-out ** Bezel  Cut-outs must be punched in the direction of insertion	<b>B</b> Black  <b>W</b> White	Lit (DP) <b>A</b> Amber  <b>C</b> Clear  <b>G</b> Green  <b>R</b> Red  Lit (DP) <b>B</b> Black  <b>R</b> Red  <b>W</b> White	Blank  <b>2</b> 125V Neon  <b>3</b> 250V Neon  <b>5</b> 12Vdc LED (P Rocker)  <b>6</b> 24Vdc LED (P Rocker)  <b>7</b> 12V Filament  <b>8</b> 24Vdc Filament
<b>H</b> 	<b>6002</b>  ON - OFF (momentary OFF)  <b>6003</b>  ON - OFF Lit	<b>A</b> Softline Matt   <b>P</b> Lit window Matt 				
<b>S</b> Screw & Clamp N/A for assemblies with 3 terminals	<b>6008</b>  ON - OFF Lit (Unswitched neutral)  <b>6009</b>  ON - OFF (momentary ON) Lit (Unswitched neutral)  <b>6010</b>  ON - ON  <b>6011</b>  ON - ON (momentary 1 side)					

## Integral Splash Resistance




Current carrying parts are protected from moisture. Droplets which may enter the switch are channelled out through ports in the switch body. For IP65 see options below

## Dimensions



Panel thickness  
L 0.75 to 2.5mm

Legend	Legend Colour	Options
Blank	Blank	<b>G74</b> Protective Cover
<b>1223</b>	<b>B</b> Black	<p><b>Finish</b> Matt is standard.</p> <p><b>Colour</b> Call sales for custom colours. A full range is available for large orders.</p> <p><b>Legend printing</b> Select from the examples or call sales for custom legends.</p> <p><b>Lamp voltage</b> Call sales for details.</p> <p><b>Protective cover</b> A snap on cover is available (add G after body code), this reduces panel thickness by 2mm.</p>  <p>Panel sealing washer W46 is available, this reduces panel thickness by 1.2mm.</p> <p>Covers are not suitable for momentary types. For all options call the factory</p>
	<b>W</b> White	

## Examples



C6000AL - - -



C6000AL - - -



C6010AL - - -



C6003AL - - -



C6003PL - - -



C6030AL - - -

# 6050 DP Splash Resistant Switches

& Twin Switches - 16A 250Vac



## Key Features

- Ratings up to 20A, 277V ac
- Positive switch action
- Distinctive styling
- Illuminated & non-illuminated
- Double Contact
- DC LED Illumination Available
- Panel cut out: 30.1 x 22.2mm



























## Approvals and specifications

European 16(4)A 250Vac T125, 10A 400Vac T125

UL (except 6054 & 6055 Switches) 20A 277Vac, 250Vac 11/2hp, 125Vac 1hp


UL 100°C

3mm contact gap with Positive Break switching.

Terminal	Function	Rocker	Body	Body Colour	
<div>C</div> <div></div> <div>6.3 x 0.8</div>	<div>6050</div> <div></div> <div>ON - OFF</div> <div>6051</div> <div></div> <div>ON - OFF (momentary ON)</div> <div>6052</div> <div></div> <div>ON - OFF (momentary OFF)</div> <div>6053</div> <div></div> <div>ON - OFF Lit</div> <div>6054</div> <div></div> <div>ON - OFF (momentary ON) Lit</div> <div>6055</div> <div></div> <div>ON - OFF (Single Contact) (momentary ON) Lit</div> <div>6056</div> <div></div> <div>ON - OFF (Single Contact) Isolated light</div> <div>6057</div> <div></div> <div>ON - OFF Isolated light</div> <div>6058</div> <div></div> <div>ON - OFF (Single Contact) Lit</div> <div>6059</div> <div></div> <div>ON - OFF (Single Contact) (momentary ON) Isolated light</div>	<div>6060</div> <div></div> <div>ON - ON</div> <div>6061</div> <div></div> <div>ON - ON (momentary 1 side)</div> <div>6062</div> <div></div> <div>2 Circuit ON - ON (In house tests only)</div> <div>6066</div> <div></div> <div>ON - ON (Single Contact) Isolated light</div> <div>6067</div> <div></div> <div>ON - ON Lit</div> <div>6068</div> <div></div> <div>ON - ON 1 Contact ON - OFF Lit 1 Contact</div> <div>6090</div> <div></div> <div>ON - OFF 1 Contact ON - OFF Lit 1 Contact</div> <div>6091</div> <div></div> <div>ON - OFF (momentary ON) Lit</div> <div>6092</div> <div></div> <div>ON - OFF 1 Contact ON - ON 1 Contact Lit</div> <div>Circuits are Double Contact unless described otherwise</div>	<div>A</div> <div>Softline Matt</div> <div></div> <div>A</div> <div>Softline Matt</div> <div></div> <div>P</div> <div>Lit window Matt</div> <div></div> <div>Lit window</div>	<div>L</div> <div>Double Contact</div> <div>Panel cut-out ** Bezel</div> <div></div> <div>L</div> <div>Twin units</div> <div>Contact sales for information on splash resistance and IP ratings</div> <div></div> <div>P</div> <div>Lit window Matt</div> <div></div>	<div>Lit (DP)</div> <div>A</div> <div>Amber</div> <div>C</div> <div>Clear</div> <div>G</div> <div>Green</div> <div>R</div> <div>Red</div> <div>Un-Lit (DP)</div> <div>B</div> <div>Black</div> <div>R</div> <div>Red</div> <div>W</div> <div>White</div>




## Integral Splash Resistance



Current carrying parts are protected from moisture. Droplets which may enter the switch are channelled out through ports in the switch body.

For IP65 see options below

## Dimensions




Panel thickness


L 0.75 to 2.5mm

Terminal spacing - Contacts 10.5 between centres

## Vary with Function

Approvals & ratings vary with function  
ON OFF Switches - ON when pressed over terminals 3 & 6.



Rocker Colour	Lamp Voltage	Legend	Legend Colour	Options
<b>B</b> Black	Blank	Blank	Blank	<b>G72</b> Protective Cover
<b>R</b> Red	<b>2</b> 125V Neon	<b>1223</b>	<b>B</b> Black	<a href="#">Finish</a> Matt is standard.
<b>W</b> White	<b>3</b> 250V Neon		<b>W</b> White	<a href="#">Colour</a> Call sales for custom colours. A full range is available for large orders.
	<b>5</b> 12Vdc LED (P Rocker)			<a href="#">Legend printing</a> Select from the examples or call sales for custom legends.
	<b>6</b> 24Vdc LED (P Rocker)			<a href="#">Protective cover</a> The 6050 series is a water through design. For a higher level of sealing, a snap on cover is available (add G after body code). This reduces panel thickness by 1mm.
	<b>7</b> 12V Filament			
	<b>8</b> 24Vdc Filament			Panel sealing washer W42 is available. This reduces panel thickness by 1.00mm. Covers are not suitable for momentary types.
				<a href="#">IP Ratings</a> Call the sales for details.
				<a href="#">Terminal Link P1067</a> connects the Contacts of a double Contact switch or twin unit.
				# Mounting orientation may affect IP rating.

## Examples



▣ C6050AL - - -



▣ C6053AL - - -



▣ C6053PL - - -



▣ C6000A/C6000AL



▣ C6003P/C6003PL



▣ C6003P/C6030AL

# 1500 Standard & 1300 High Inrush Switches

150A to EN61058-1 and 16A 250Vac



## Key Features

- Standard rocker switch
- Non-illuminated
- 150A inrush
- Choice of switching circuits including 3 position
- Choice of bezel styles
- Choice of panel cut outs
- Matching indicator
- Single Contact
- Splash resistant option
- DC LED Illumination Available for "P" Rocker
- Panel cut out 'A' style: 27.3 x 12.3mm

## Approvals and specifications

1500 Series 16(4)A 250Vac T125 (European Approvals Pending)

UL 16A Non Ind 250Vac, (2 posn) 250Vac 1hp, 125Vac 1/2hp, (3 posn) 250Vac 1/2hp, 125Vac 1/4hp  
1330 36Vdc 14A  
1350 72 Vdc 7A  
1500 & 1510 14 Vdc 10A  
UL 85°C

**In house test:**  
10A 24Vdc—Indicative rating only

1300 series 16(4)A 250Vac T125 1E4 (10,000 Ops.)


Terminal	Function	Rocker	Body	Finish	Body Colour
<b>C</b>  6.3 x 0.8	<b>Standard 1500</b> ON - OFF <b>1501</b> HP rating N/A ON - OFF (momentary ON) <b>1502</b> HP rating N/A ON - OFF (momentary OFF) <b>1510 μ</b> HP rating N/A ON - ON <b>1511 μ</b> HP rating N/A ON - ON (momentary 1 side) <b>1520 μ</b> 125V & 250V 1/2 HP H terminal rated T100 only ON - OFF - ON <b>1521 μ</b> HP rating N/A H terminal rated T100 only ON - OFF - ON (momentary 1 side) <b>1522 μ</b> HP rating N/A H terminal rated T100 only ON - OFF - ON (momentary 2 sides) <b>0430 (Indicator)</b> HP rating N/A H terminal rated T100 only <b>1484</b> In-house tested to 10(3)A 250Vac 3 position selective <b>1487</b> In-house tested to 10(3)A 250Vac 3 position selective <b>High Inrush 1300</b> ON - OFF	<b>A</b> Softline Matt <b>B</b> Splash resistant (with Arcshield) Matt <b>H</b> Slotted (for custom Adaptors) not momentary <b>V</b> Curved Matt or gloss <b>W</b> Splash resistant (with Arcshield) Matt <b>X</b> Two colour Matt ON - OFF only (not momentary) <b>F</b> Flat lens Gloss (0430 only) <b>A</b> Softline lens Matt (0430 only) as F but with raised profile	Panel cut-out Bezel Cut-outs must be punched in the direction of insertion <b>A</b> 27.2/27.3 12.2/12.3 30.2 14.0/14.0 Gloss or Matt <b>B</b> 30.0/30.1 11.0/11.1 33.4 14.0/14.0 R3.5 Matt only <b>L</b> 30.0/30.1 11.0/11.1 32.0 14.0/14.0 R1.0 Matt only <b>Q</b> 28.2/28.3 11.5/11.6 30.2 14.0/14.0 R1.6 Gloss or matt <b>R</b> 28.5/28.6 14.0/14.1 31.5 17.0/17.0 Matt only <b>T</b> 28.2/28.3 11.5/11.6 30.2 14.0/14.0 R1.6 Matt only	<b>M</b> Matt <b>G</b> Gloss Applies to both Rocker & Body	<b>B</b> Black <b>R</b> Red <b>W</b> White

## Dimensions

150A Inrush to EN61058-1  
UL 20A 250Vac 1hp, 125Vac 1/2hp  
UL 85°C

**In house test:**  
20A 24Vdc — Indicative rating only

3mm contact gap except if marked  $\mu$ .




**Panel thickness**  
A,Q 0.75 to 3.3mm  
L,B,T 0.75 to 2.5mm  
R 0.75 to 3.0mm

## Splash Resistance


### 1500 W and B splash resistant options

Feather edge seals and a close fitting collar protect current carrying parts from moisture.  
B option has Hytrel collar/seals for enhanced protection.



### 1300 High inrush, positive break switching

The 1300 series mechanism ensures contact welds formed at switch-on are positively separated by the plunger tube acting directly on the step in the moving contact.

Rocker Colour	Lamp Voltage	Insert Colour	Legend	Legend Colour	Options
Un-Lit	Blank	Blank	Blank	Blank	Finish Matt is standard.
<b>B</b> Black	<b>2</b> 125V Neon	<b>R</b> Red	<b>602A</b>	<b>B</b> Black	Colour Call sales for custom colours. A full range is available for large orders.
<b>R</b> Red	<b>3</b> 250V Neon	<b>W</b> White		<b>W</b> White	Legend printing Select from the examples or call sales for custom legends.
<b>W</b> White	<b>7</b> 12V Filament				Lamp voltage Call sales for details.
Lit	<b>8</b> 24Vdc Filament				Blanking plates A0434 - - Dummy units to fill unused panel holes.
<b>A</b> Amber					Protective cover Snaps on to A, L, Q or T bodies (add G after body code in cat no.), this reduces panel thickness by 1mm.
<b>C</b> Clear					
<b>G</b> Green					Panel sealing washer W46 is available for the same body sizes, this reduces panel thickness by a further 0.8mm. Covers are not suitable for momentary types.
<b>R</b> Red					For all options call sales.

## Examples



C1500AR - - -  
T1500AR - - -



C1500AL - - -  
T1500AL - - -



C1500XL - - -  
T1500XL - - -



C1510AL - - -  
T1510AL - - -




C1520AL - - -  
T1520AL - - -



C0430AL - - -  
T0430AL - - -

# 5500 Lit Rocker Switches

10A 250Vac



## Key Features

- Standard rocker switch
- Illuminated
- Choice of switching circuits
- Choice of bezel styles
- Choice of panel cut outs
- Matching indicator
- Single Contact
- Splash resistant option
- Panel cut out 'A' style:












## Approvals and specifications

16(4) A, 250 V ac, 50/60 Hz, IP40, 1E4, T85/55, micro disconnection  
12 A, 250 V ac, 50/60 Hz, IP40, 1E4, T125/55, micro disconnection

UL 15A 250Vac, CSA 16A Non Ind 250Vac  
UL 250Vac 1hp, 125Vac 1/2hp  
UL 85°C

μ contact gap.


For Twin units repeat the order details for both the left and right sides.

Terminal	Function	Rocker	Body	Body Colour	Rocker Colour
<b>C</b>  6.3 x 0.8	Approvals & ratings vary with function ON OFF Switches - ON when pressed over terminal 3 	<b>A</b> Softline (Matt only) 	<b>A</b> Panel Cut - outs  12.2/12.3 27.2 27.3 Bezel  30.2 14.0	<b>B</b> Black	Un-Lit  <b>B</b> Black
<b>H</b>  4.8 x 0.8	<b>5500 μ</b>  ON - OFF Single Contact	<b>P</b> Lit window (Matt only) 	<b>B</b>  30.0 30.1 11.0/11.1  R3.5 33 14.0	<b>W</b> White	<b>R</b> Red  <b>W</b> White
<b>T</b>  Ø2.1 Solder	<b>5503 μ</b>  ON - OFF Lit Switched neutral		<b>L</b>  30.0 30.1 11.0/11.1  R1.0 31.9 14.0		Lit
	<b>5508 μ</b>  ON - OFF Lit Unswitched neutral		<b>Q</b>  28.2 28.3 11.5/11.6  R1.6 30.2 14.0		<b>A</b> Amber
			<b>R</b>  28.5 28.6 14.0/14.1  31.5 17.0		<b>C</b> Clear  <b>G</b> Green
			<b>T</b>  28.2 28.3 11.5/11.6  R1.6 30.2 14.0		<b>R</b> Red

## Dimensions


### Panel thickness

**A, Q** 0.75 to 3.3mm  
**L, B, T** 0.75 to 2.5mm  
**R** 0.75 to 3.0mm




### Twin units

Two single switches or a switch and an indicator light can be assembled side by side in one double Contact body.  
 For 5500 range panel cut-out details (L, B and T) call sales.



Terminal spacing -  
 Contacts 10.8 between centres (twin units)

For twin units the first set of order format details refer to the left hand unit, when looking at the front of the assembly.  
 (This has terminal numbers 1, 2 & 3)

Lamp Voltage	Legend	Legend Colour	Options
Blank	Blank	Blank	<p><b>Finish</b>            Matt is standard.</p> <p><b>Colour</b>            Call factory for custom colours.            A full range is available for large orders.</p> <p><b>Legend printing</b>            Select from the examples or            call factory for custom legends.</p> <p><b>Lamp voltage</b>            Call factory for details.</p> <p><b>Blanking plate A0434 - - (SP) A0494 - - (DP)</b>            Dummy units to fill unused panel holes.</p> <p><b>Protective cover</b>            Snaps on to A, L, Q or T bodies (add G after            body in cat no.), this reduces panel thickness            by 1.00mm.</p>  <p>Panel sealing washers W46 (Single Contact)            and W42 (Double Contact) are available for            these body types, this reduces panel thickness            by 2mm.</p> <p>For all options call the factory.</p>
<b>2</b> 125V Neon	<b>602A</b>	<b>B</b> Black	
<b>3</b> 250V Neon		<b>W</b> White	
<b>5</b> 12Vdc LED (P Rocker) IF = 20-30mA			
<b>6</b> 24Vdc LED (P Rocker) IF = 20-30mA			
<b>7</b> 12V Filament			
<b>8</b> 24Vdc Filament			

## Examples



C5503AL - - -



C5500AL - - -



C5503PL - - -



C5503A/C5430AL



C5503A/C5503AL



C5503P/C5503PL




































- Twin unit rocker switch
- Choice of switching circuits including 3 position
- Push-on, solder and PCB terminals
- Choice of bezel styles
- Choice of panel cut outs
- Matching indicator
- Single Contact switches
- Splash resistant option
- Panel cut out 'A' style: 27.2 x 22.3mm

16(4)A 250Vac T125 (**Pending**)


UL 16A 250Vac  
UL (2 posn) 250Vac 1hp, 125Vac 1/2hp, (3 posn) 250 Vac  
1/2hp, 125Vac 1/4hp  
UL 85°C

For versions with High Inrush or for 50,000 operations,  
3mm contact gap except where marked μ.

Terminal	Function	Rocker	Body	Finish	Body Colour	Rocker Colour
<b>C</b> 	<p>Approvals &amp; ratings vary with function ON OFF Switches - ON when pressed over terminal 1 or 4</p> 	<b>A</b> Softline (Matt only) 	<p>Panel Cut - outs      Bezel</p> <div style="display: flex; justify-content: space-around;"> <div> <b>A</b>   </div> <div> <b>B</b>   </div> </div>	<b>M</b> Matt	<b>B</b> Black	Un-Lit  <b>B</b> Black
<b>H</b> 	<b>1500</b> 	<b>B</b> Softline (Matt only) 	<div style="display: flex; justify-content: space-around;"> <div> <b>B</b>   </div> <div> <b>L</b>   </div> </div>	<b>G</b> Gloss	<b>W</b> White	<b>R</b> Red
<b>T</b> 		<b>W</b> Softline (Matt only) 	<div style="display: flex; justify-content: space-around;"> <div> <b>L</b>   </div> <div> <b>T</b>   </div> </div>	Applies to both Rocker & Body		<b>W</b> White
<b>K</b> 	<b>1520 µ</b> 	<b>X</b> Softline (Matt only) 	<div style="display: flex; justify-content: space-around;"> <div> <b>Q</b>   </div> <div> <b>R</b>   </div> </div>			Lit
<b>K</b> 	<b>0430</b> 	<b>A</b> Softline (Matt only) 	<div style="display: flex; justify-content: space-around;"> <div> <b>R</b>   </div> <div> <b>T</b>   </div> </div>			<b>A</b> Amber
<b>X</b> 		<b>A</b> Softline (Matt only) 	<div style="display: flex; justify-content: space-around;"> <div> <b>R</b>   </div> <div> <b>T</b>   </div> </div>			<b>C</b> Clear
			<div style="display: flex; justify-content: space-around;"> <div> <b>R</b>   </div> <div> <b>T</b>   </div> </div>			<b>G</b> Green
			<div style="display: flex; justify-content: space-around;"> <div> <b>R</b>   </div> <div> <b>T</b>   </div> </div>			<b>R</b> Red

## Dimensions


**Panel thickness**  
**A,Q** 0.75 to 3.3mm  
**L,B,T** 0.75 to 2.5mm  
**R** 0.75 to 3.0mm



Call sales for terminal spacing details


## Twin units

Two single switches or a switch and an indicator light can be assembled side by side in one double Contact body.



For twin units the first set of order format details refer to the left hand unit, when looking at the front of the assembly.  
 (This has terminal numbers 1, 2 & 3)

## Splash Resistant



Feather edge seals and a close fitting collar protect current carrying parts from moisture.

B option has Hytrel collar/seals for enhanced protection.

Insert Colour	Lamp Voltage	Legend	Legend Colour	Options
Blank	Blank	Blank	Blank	<p><b>Finish</b> Matt is standard.</p> <p><b>Colour</b> Call factory for custom colours. A full range is available for large orders.</p> <p><b>Legend printing</b> Select from the examples or call factory for custom legends.</p> <p><b>Lamp voltage</b> Call factory for details.</p>
<b>R</b> Red	<b>2</b> 125V Neon	<b>602A</b>	<b>B</b> Black	
<b>W</b> White	<b>3</b> 250V Neon		<b>W</b> White	
	<b>5</b> 12Vdc LED (P Rocker)			
	<b>6</b> 24Vdc LED (P Rocker)			
	<b>7</b> 12V Filament			
	<b>8</b> 24Vdc Filament			

## Examples



C1500A/C1500AL



C1500A/C0430AL



C1500X/C1500XL



C1520A/C1510AL



C1500A/C1520AL






C0430A/C0430AL


































































## Key Features

- Standard rocker switch
- Matching indicator
- 1350/53 high inrush
- Double Contact
- Choice of switching circuits including 3 position
- Splash resistant option
- Push-on, solder and PCB terminals
- Panel cut out 'A' style: 27.2 x 22.3mm
- Choice of bezel styles
- Choice of panel cut outs

## Approvals and specifications

-  1550 Series 16(4)A 250Vac T125 (**Pending**)  
 UL 16A 250Vac, (2 posn) 250Vac 1hp, 125Vac 1/2hp,  
 1350 72 Vdc 7A  
 (3 posn) 250 Vac 1/2hp, 125Vac 1/4hp.  
 UL 85°C
- In house test:**  
 10A 24Vdc—Indicative rating only. NB Types fitted with Neon will not illuminate for low DC voltage applications.
-  1350 series 16(4)A 250Vac T125 1E4 (10,000 Ops.)  
 1330 series 16(6)A 250Vac T125 1E4 (10,000 Ops.)  
 150A Inrush to EN61058-1.

Terminal	Function		Rocker	Body
<div>C</div> <div></div> <div>6.3 x 0.8</div>	<div>Standard 1550</div> <div></div> <div>ON - OFF</div>	<div>0480</div> <div>X terminal N/A</div> <div></div> <div>ON - OFF</div>	<div>A</div> <div>Softline Matt</div> <div></div> <div></div>	<div>Panel cut-out Bezel</div> <div>Cut-outs must be punched in the direction of insertion</div> <div><div>A</div><div></div><div>27.2 27.3 22.3/22.4 25.0 30.2</div><div>Gloss or Matt</div></div>
<div>H</div> <div></div> <div>4.8 x 0.8*</div>	<div>1551</div> <div>HP rating N/A</div> <div></div> <div>ON - OFF (momentary ON)</div>	<div>High Inrush 1350</div> <div>Not W, X or B rocker</div> <div></div> <div>ON - OFF</div>	<div>B</div> <div>Splash resistant Softline</div> <div></div>	<div><div>B</div><div></div><div>30.0 30.1 22.1/22.2 25.0 33.4</div><div>Matt only</div></div>
<div>K</div> <div></div> <div>2.8 x 0.8*</div>	<div>1552</div> <div>HP rating N/A</div> <div></div> <div>ON - OFF (momentary OFF)</div>	<div>1353</div> <div>Not W, X or B rocker</div> <div></div> <div>ON - OFF Lit</div>	<div>V</div> <div>Curved</div> <div></div> <div></div> <div>Matt or Gloss</div> <div>Gloss only</div> <div>Lit (not momentary)</div>	<div><div>B</div><div></div><div>30.0 30.1 22.1/22.2 25.0 33.4</div><div>Matt only</div></div>
<div>T</div> <div></div> <div>2.8 x 0.8*</div>	<div>1553</div> <div>Not W, X or B rocker</div> <div></div> <div>ON - OFF Lit</div>	<div>High Inrush 1300</div> <div>ON - OFF</div> <div></div> <div>ON - OFF Lit</div>	<div>W</div> <div>Splash resistant Curved</div> <div></div>	<div><div>L</div><div></div><div>30.0 30.1 22.1/22.2 25.0 32.0</div><div>Matt only</div></div>
<div>K</div> <div></div> <div>2.8 x 0.8*</div>	<div>1560 μ</div> <div></div> <div>ON - ON</div>	<div>0480</div> <div>X terminal N/A</div> <div></div> <div>ON - OFF</div>	<div>P</div> <div>Lit window Matt</div> <div></div> <div></div> <div>Lit (not momentary)</div>	<div><div>L</div><div></div><div>30.0 30.1 22.1/22.2 25.0 32.0</div><div>Matt only</div></div>
<div>T</div> <div></div> <div>2.8 x 0.8*</div>	<div>1561 μ</div> <div>HP rating N/A</div> <div></div> <div>ON - ON (Momentary 1 Side)</div>	<div>High Inrush 1300</div> <div>ON - OFF</div> <div></div> <div>ON - OFF Lit</div>	<div>X</div> <div>Two colour Matt</div> <div></div> <div>(ON OFF only - not momentary)</div>	<div><div>Q</div><div></div><div>28.2 28.3 22.3/22.4 25.0 30.2</div><div>Gloss or matt</div></div>
<div>T</div> <div></div> <div>2.8 x 0.8*</div>	<div>1562 μ</div> <div>In house tests only</div> <div></div> <div>2 Circuit ON - ON</div>	<div>0480</div> <div>X terminal N/A</div> <div></div> <div>ON - OFF</div>	<div>R</div> <div>Round</div> <div></div>	<div><div>Q</div><div></div><div>28.2 28.3 22.3/22.4 25.0 30.2</div><div>Gloss or matt</div></div>
<div>U</div> <div></div> <div>2.8 x 0.8*</div>	<div>1570 μ</div> <div>125V &amp; 250V 1/2 HP H terminal rated T100 only H terminal rated T100 only</div> <div></div> <div>ON - OFF - ON</div>	<div>High Inrush 1300</div> <div>ON - OFF</div> <div></div> <div>ON - OFF Lit</div>	<div>R</div> <div>Round</div> <div></div>	<div><div>R</div><div></div><div>28.4 28.5 25.3/25.4 28.9 33.2</div><div>Matt only</div></div>
<div>U</div> <div></div> <div>2.8 x 0.8*</div>	<div>1571 μ</div> <div>HP rating N/A H terminal rated T100 only</div> <div></div> <div>ON - OFF - ON (momentary 1 side)</div>	<div>0480</div> <div>X terminal N/A</div> <div></div> <div>ON - OFF</div>	<div>F</div> <div>Flat Lens Gloss (0480)</div> <div></div>	<div><div>R</div><div></div><div>28.4 28.5 25.3/25.4 28.9 33.2</div><div>Matt only</div></div>
<div>U</div> <div></div> <div>2.8 x 0.8*</div>	<div>1572 μ</div> <div>HP rating N/A H terminal rated T100 only</div> <div></div> <div>ON - OFF - ON (momentary 2 sides)</div>	<div>High Inrush 1300</div> <div>ON - OFF</div> <div></div> <div>ON - OFF Lit</div>	<div>A</div> <div>Softline lens Matt (0480 only) as F but with raised profile</div> <div></div>	<div><div>T</div><div></div><div>28.2 28.3 22.3/22.4 25.0 30.2</div><div>Matt only</div></div>
<div>X</div> <div></div> <div>2.8 x 0.8*</div>	<div>1572 μ</div> <div>HP rating N/A H terminal rated T100 only</div> <div></div> <div>ON - OFF - ON (momentary 2 sides)</div>	<div>0480</div> <div>X terminal N/A</div> <div></div> <div>ON - OFF</div>	<div>A</div> <div>Softline lens Matt (0480 only) as F but with raised profile</div> <div></div>	<div><div>T</div><div></div><div>28.2 28.3 22.3/22.4 25.0 30.2</div><div>Matt only</div></div>
<div>X</div> <div></div> <div>2.8 x 0.8*</div>	<div>1572 μ</div> <div>HP rating N/A H terminal rated T100 only</div> <div></div> <div>ON - OFF - ON (momentary 2 sides)</div>	<div>High Inrush 1300</div> <div>ON - OFF</div> <div></div> <div>ON - OFF Lit</div>	<div>A</div> <div>Softline lens Matt (0480 only) as F but with raised profile</div> <div></div>	<div><div>T</div><div></div><div>28.2 28.3 22.3/22.4 25.0 30.2</div><div>Matt only</div></div>



## Approvals and specifications (continued)

**UL 20A 250Vac 1hp, 125Vac 1/2hp.**  
**UL 72Vdc 7A, 36Vdc 14A.**  
**UL 85°C.**

### In house test:

20A 24Vdc—Indicative rating only


3mm contact gap except if marked  $\mu$ .

## Splash Resistance




**1300 High inrush, positive break switching**  
The 1300 series mechanism ensures contact welds formed at switch-on are positively separated by the plunger tube acting directly on the step in the moving contact.

## Dimensions



**Panel thickness**  
A,Q 0.75 to 3.3mm  
L,B,T 0.75 to 2.5mm  
R 0.75 to 3.0mm

Finish	Body Colour	Rocker Colour	Insert Colour	Lamp Voltage	Legend	Legend Colour	Options
<div>M</div> <div>Matt</div>	<div>B</div> <div>Black</div>	<div>Un-Lit</div> <div>B</div> <div>Black</div> <div>R</div> <div>Red</div> <div>W</div> <div>White</div> <div>Lit</div> <div>A</div> <div>Amber</div> <div>G</div> <div>Green</div> <div>C</div> <div>Clear</div> <div>R</div> <div>Red</div>	<div>Blank</div> <div>R</div> <div>Red</div> <div>W</div> <div>White</div>	<div>Blank</div> <div>2</div> <div>125V Neon</div> <div>3</div> <div>250V Neon</div> <div>5</div> <div>12Vdc LED (P Rocker)</div> <div>6</div> <div>24Vdc LED (P Rocker)</div> <div>7</div> <div>12V Filament</div> <div>8</div> <div>24Vdc Filament</div>	<div>Blank</div> <div>602A</div>	<div>Blank</div> <div>B</div> <div>Black</div> <div>W</div> <div>White</div>	<div>Finish</div> <div>Matt is standard.</div> <div>Colour</div> <div>Call sales for custom colours.</div> <div>A full range is available for large orders.</div> <div>Legend printing</div> <div>Select from the examples or call sales for custom legends.</div> <div>Lamp voltage</div> <div>Call sales for details.</div> <div>Blanking plates A0494</div> <div>Dummy units to fill unused panel holes.</div> <div>Protective cover</div> <div>Snaps on to A, L, Q or T bodies (add G after body in cat no). This reduces panel thickness by 1mm.</div> <div></div>
<div>Examples</div>							

## Examples



□ C1350AL ---



□ C1550XL ---



□ C1553PL ---



□ C1553RA ---  
Shown with M614  
bezel cover



Optional snap-in  
M441 barrier




C1553AA with M616  
guard Cut-out  
22.0/22.1 x 29.4/29.5  
Guard accepts "A"  
body only



□ C0480RA ---  
Shown with  
M614 bezel  
cover



□ C0480AL ---



Panel sealing washer W42 is available for the above body sizes. This reduces panel thickness by a further 1.00mm.  
Covers are not suitable for momentary types.

For all options call sales.

# 1550 Standard & 1350 High Inrush Switches

150A to EN61058-1 and 16A 250Vac/250Vac



## Key Features

- Standard rocker switch
- 1350/53 high inrush
- Choice of switching circuits including 3 position
- Push-on, solder and PCB terminals
- Choice of bezel styles
- Choice of panel cut outs
- Matching indicator
- Double Contact
- Option with guard & cover
- DC LED Illumination Available for "P" Rocker
- Bezel size 'G' style 32.0 x 25.0

## Approvals and specifications

- 1550 Series 16(4)A 250Vac T125 (Pending)
- UL 16A 250Vac, (2 posn) 250Vac 1hp, 125Vac 1/2hp, (3 posn) 250 Vac 1/2hp, 125Vac 1/4hp. UL 85°C.
- 1350 series 16(4)A 250Vac T125 1E4 (10,000 Ops.)
- 1330 series 16(6)A 250Vac T125 1E4 (10,000 Ops.)
- 150A Inrush to EN61058-1.

Terminal	Function	Rocker	Body	Finish	Body Colour	Rocker Colour
<b>C</b>  6.3 x 0.8	<b>Standard 1550</b>  ON - OFF <b>1551</b> HP rating N/A  ON - OFF (momentary ON) <b>1552</b> HP rating N/A  ON - OFF (momentary OFF) <b>1553</b> Not W, X or B rocker  ON - OFF Lit <b>1560 µ</b>  ON - ON <b>1561 µ</b> HP rating N/A  ON - ON (Momentary 1 Side) <b>1562 µ</b> In house tests only  ON - ON 2 Circuit <b>1570 µ</b> 125V & 250V 1/2 HP H terminal rated T100 only H terminal rated T100 only <b>1571 µ</b> HP rating N/A H terminal rated T100 only  ON - OFF - ON (momentary 1 side) <b>1572 µ</b> HP rating N/A H terminal rated T100 only  ON - OFF - ON (momentary 2 sides)	<b>A</b> Softline Matt  <b>V</b> Curved Matt or Gloss  Gloss only Lit (not momentary)  <b>P</b> Lit window Matt  Lit (not momentary) 	Panel cut-out Bezel Cut-outs must be punched in the direction of insertion <b>H</b>  22.1/22.2 30.0 30.1 32.0 25.0 Matt only <b>G</b>  22.1/22.2 30.0 30.1 32.0 25.0 Matt only	<b>M</b> Matt <b>G</b> Gloss Applies to both Rocker & Body	<b>B</b> Black <b>W</b> White	Un-Lit <b>B</b> Black <b>R</b> Red <b>W</b> White Lit <b>A</b> Amber <b>G</b> Green <b>C</b> Clear <b>R</b> Red
<b>H</b>  4.8 x 0.8*	<b>1552</b> HP rating N/A <b>1553</b> Not W, X or B rocker					
<b>K</b>  2.0 2.8 x 0.8*	<b>1561 µ</b> HP rating N/A <b>1562 µ</b> In house tests only					
<b>T</b>  Ø2.1 7.0 Solder	<b>1570 µ</b> 125V & 250V 1/2 HP H terminal rated T100 only H terminal rated T100 only <b>1571 µ</b> HP rating N/A H terminal rated T100 only					
<b>U</b>  Ø2.1 3.2 Right angle T Solder (Not DP)	<b>1572 µ</b> HP rating N/A H terminal rated T100 only					
<b>X</b>  Ø2.1 3.2 PCB 0.8Sq* *Contact sales for details on 1350 series	<b>High Inrush 1350</b> Not W, X or B rocker <b>1353</b> Not W, X or B rocker <b>High Inrush 1300</b> ON - OFF	 ON - OFF  ON - OFF Lit				

## Approvals and specifications cont..

### In house test:

10A 24Vdc—Indicative rating only

 **UL 20A 250Vac 1hp, 125Vac 1/2hp.**  
UL 72Vdc 7A, 36Vdc 14A, UL 85°C.

### In house test:

20A 24Vdc—Indicative rating only

3mm contact gap except if marked  $\mu$


## Splash Resistance



### 1350 High inrush, positive break switching

The 1350 series mechanism ensures contact welds formed at switch-on are positively separated by the plunger tube acting directly on the step in the moving contact.

## Dimensions



### Panel thickness


G, H 0.75 to 2.5mm

Terminal spacing - Contacts 10.2 between centres

Insert Colour	Lamp Voltage	Legend	Legend Colour	Options
Blank	Blank	Blank	Blank	<a href="#">Finish</a> Matt is standard.
<b>R</b> Red	<b>2</b> 125V Neon	<b>602A</b>	<b>B</b> Black	<a href="#">Colour</a> Call sales for custom colours. A full range is available for large orders.
<b>W</b> White	<b>3</b> 250V Neon		<b>W</b> White	<a href="#">Legend printing</a> Select from the examples or call sales for custom legends.
	<b>5</b> 12Vdc LED (P Rocker)			<a href="#">Lamp voltage</a> Call sales for details.
	<b>6</b> 24Vdc LED (P Rocker)			
	<b>7</b> 12V Filament			
	<b>8</b> 24Vdc Filament			

## Examples



 C1553AH - - -



 C1550AH - - -

# R13 Round Rocker Switches

10A 250Vac



## Key Features

- ⬡ Miniature round rocker switch
- ⬡ Ratings up to 10A, 250Vac
- ⬡ Single & double Contact
- ⬡ Illuminated & nonilluminated, neon and LED
- ⬡ Choice of actuators
- ⬡ Matching indicator
- ⬡ Panel cut out: 20.2 dia.

## Approvals and specifications


### RoHS compliant

Single Contact has  $\mu$  contact gap.


### Special products

Are made to order and can be supplied with a range of body and rocker / lens colours, print & lamp voltage.

## Dimensions




Snap fixing into 2.0 to 3.0mm panels




Snap fixing into 0.7 to 3.0mm panels

### Single Contact



### Double Contact




### Protective cover L188



Snap on to bodies (not R13 211 or R13 112LP), this reduces maximum acceptable panel thickness to 2.4mm.

## Examples



R13 112B NAA



R13 112A AAA



R13 112A2 ---

**R13 / 112 / A / B / B / 3 / 2 / 602A / W / L188**

Series

Type

Function

Body Colour

Rocker Colour

Insert Colour

Lamp Voltage

Legend

Legend Colour


Legend Colour

## Product details




  
 SP ON - OFF μ  
**Cat no.**  
**R13 112A AAA**



  
 SP ON - OFF μ  
 Lit 230V  
**Cat no.**  
**R13 112B NAC**




  
 SP ON - OFF μ  
 Bright colour ON signal  
**Cat no.**  
**R13 112A2 - -**




  
 SP ON - OFF μ  
**Cat no.**  
**R13 112A AAB**




  
 SP ON - ON μ  
**Cat no.**  
**R13 112C AAA**




  
 SP ON - OFF μ  
 Lit Window  
**Cat no.**  
**R13 112B2 - -**




  
 SP ON - OFF μ  
 Lit 230V  
**Cat no.**  
**R13 112B NAA**




  
 SP ON - OFF - ON μ  
**Cat no.**  
**R13 112D AAA**



  
 SP ON - OFF μ  
 Paddle tip has red LED  
**Cat no.**  
**R13 112LP - -**



  
 SP ON - OFF μ  
 Lit 230V  
**Cat no.**  
**R13 112B NAB**



SP ON - OFF μ  
 (Momentary ON)  
**Cat no.**  
**R13 208F AAA\***



  
 DP ON - OFF  
**Cat no.**  
**R13 244A AAA**



DP ON - OFF  
 Lit 230V  
**Cat no.**  
**R13 244B NAA**